



JÄGER

EnviroTech



JETFLEX[®] SSD


Smart Strip Diffuser

Data sheet


JetFlex® Smart Strip Diffuser

Dimensions


	A [mm]	B [mm]	Air feed [mm]	Höhe [mm]	Weight [kg]	Active Area [m ²]	Airflow rate [m ³ /h]
SSD 1500	1680	1500	32	50	4,5	0,24	1,5 - 20
SSD 2000	2180	2000	32	50	6	0,32	2 - 26
SSD 2500	2680	2500	32	50	7,5	0,4	2,5 - 32
SSD 3000	3180	3000	32	50	9	0,48	3 - 38
SSD 3500	3680	3500	32	50	10,5	0,56	3,5 - 46
SSD 4000	4180	4000	32	50	12	0,64	4 - 52

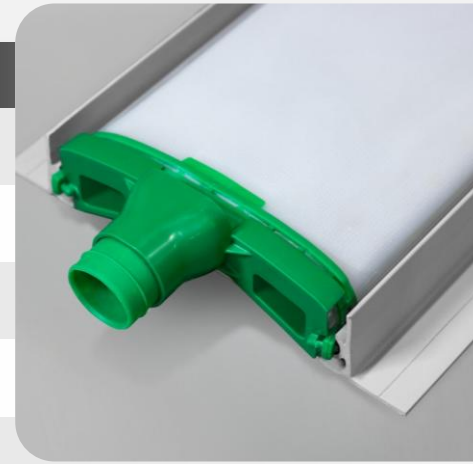

Installation drawing

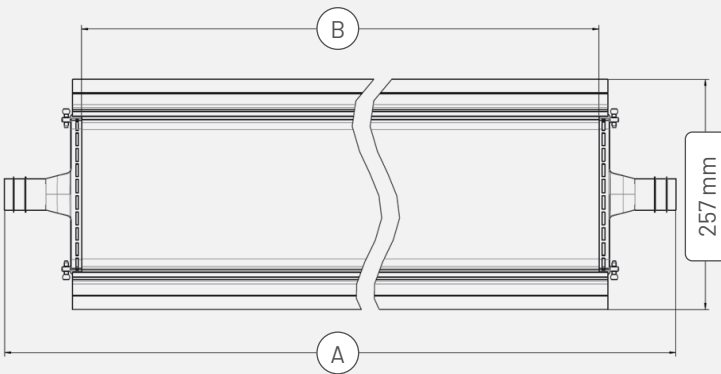

SSOTE and head loss for the SSD4000

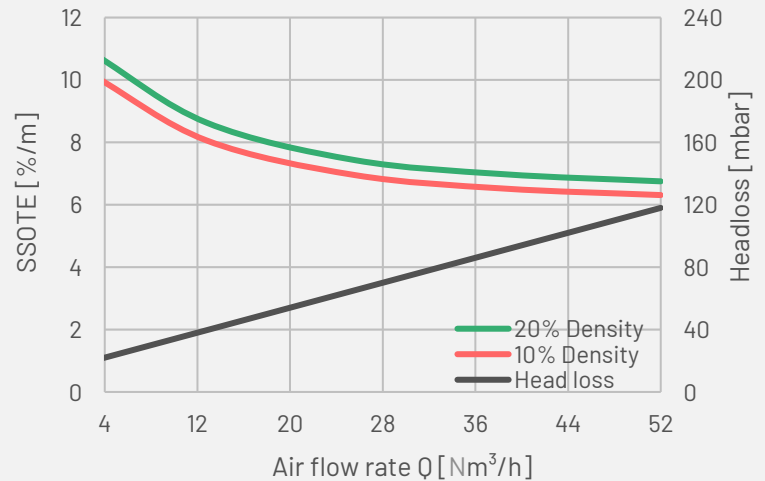

Materials

Membrane
Polyurethane

Grundprofil
PVC regranulate

Luftanschluss
Polyurethane

Operating Conditions

Water temperature
< 35 °C

Air temperature
< 60 °C

Max pressure loss
105 mbar

Accessories



Stainless steel clamp



Jaeger EnviroTech GmbH
Lohweg 1, 30559 Hanover, Germany
+49 511 646 440

info@jaeger-envirotech.com
www.jaeger-envirotech.com

Disclaimer

We exclude any liability for the information and product presentations provided. For contents of a technical nature, these are based on the status of their publication. Existing copyrights and rights to names remain unaffected.