



**JÄGER**

Umwelt-Technik



DATA SHEET

# JETFLEX<sup>®</sup> CBD 105

## COARSE BUBBLE DIFFUSER


# JETFLEX<sup>®</sup> CBD 105 COARSE BUBBLE DIFFUSER

## Membrane material

Silicone


## Diffuser body

Reinforced Polypropylene (PP-GF) with R 3/4" external tapered thread

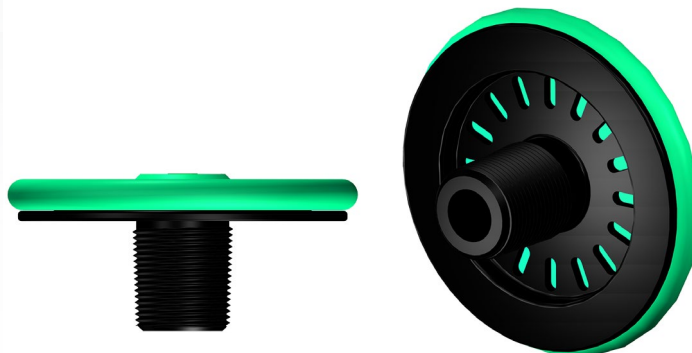

## Dimensions

Overall Diameter	Total Height	Threaded Length	Membrane Thickness
105 mm	45 mm	25 mm	2 mm

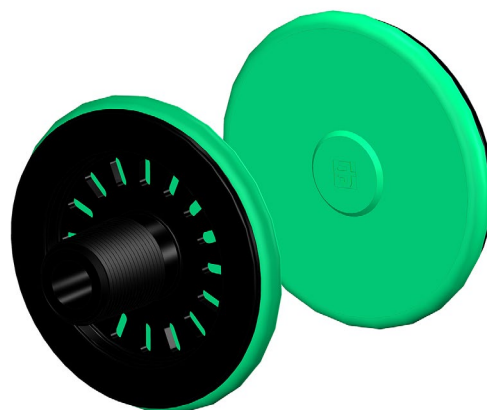

## Installation

You may install CBD 105 using our rubber saddle (EPDM) or our plastic saddle clamp. Please see our brochure "Accessories" for details and further alternatives.

## Performance data

Airflow	Headloss	SSOTE
Minimum: 2 m <sup>3</sup> /h (33 liters/minute) @ STP	10 hPa	2 %/m
Maximum: 25 m <sup>3</sup> /h (420 liters/minute) @ STP	40 hPa	1 %/m

Coarse bubble diffusers are mainly used through mixing capabilities. The rising air induces a strong current, thus removing sludge from the bottom of the tank. They are therefore a very good alternative for many mechanical aeration systems.

# JETFLEX® CBD 105 COARSE BUBBLE DIFFUSER

## CONTACT

Tel +49 511 – 64644 0

Fax +49 511 – 64644 499

[www.jaeger-envirotech.com](http://www.jaeger-envirotech.com)

[info@jaeger-envirotech.com](mailto:info@jaeger-envirotech.com)



Jäger Umwelt-Technik GmbH  
Lohweg 1  
30559 Hannover

#### **Disclaimer**

We exclude any liability for the information and product presentations provided. For contents of a technical nature, these are based on the status of their publication. Existing copyrights and rights to names remain unaffected.

Grafic, Photos: ©Adobe Stock, Jäger data base